

LED 2835



ECO

12/24 V - 120 led/m - 9,6 W/m




IP20 (F)

IP64 (K)



Parametri tecnici		
	F	K
Dimensione	5000x8x1,5 mm	5000x10x4 mm
Taglio 12 V (1)	25 mm (ogni 3 led)	
Taglio 24 V (2)	50 mm (ogni 6 led)	
Potenza	9,6 W/m	
Temperatura d'esercizio	-10°C~+45°C	-10°C~+40°C
Temperatura max. led	65°C	

Parametri illuminotecnici					
		F		K	
CCT	CRI	Lm/m	Lm/W	Lm/m	Lm/W
2700K 3step (27s)	Ra>80	940	110	-	-
3000K 3step (30s)		950	110	950	110
4000K 3step (40s)		1000	115	1000	115
5000K 3step (50s)		1000	115	-	-
6500K 3step (65s)		1010	115	1010	115

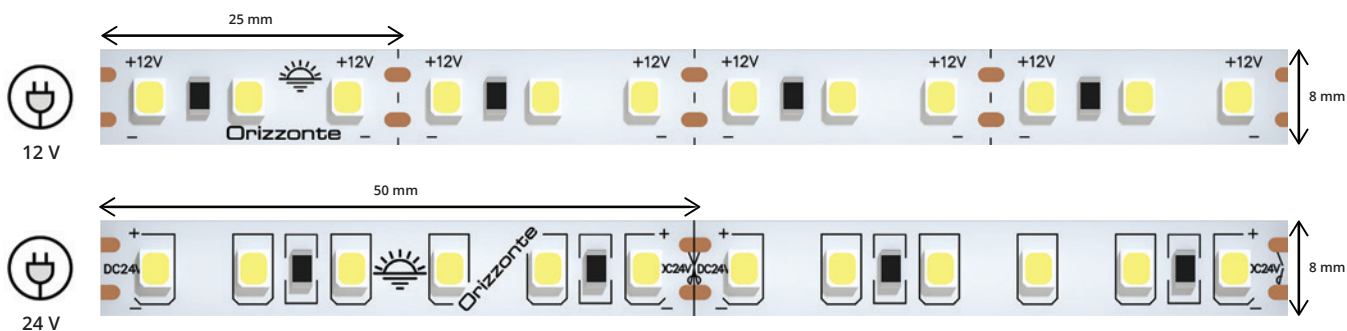

Versione	Temperatura	Grado IP	-	Tensione
OR	27s	F	52120DF	1
	30s	K		2
	40s			
	50s			
	65s			